


2720-A  
2720-B  
2820-C

Composite self-lubricating guide plate (Japanese standard)  
复合型自润滑滑板 (日本标准)

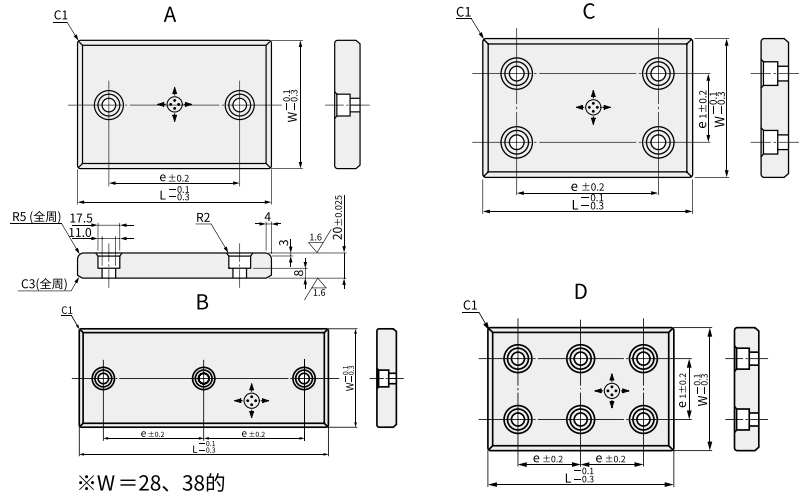

※W = 28、38的  
纵向R为R2。

**Material 材料:** 2720-A: 钢铸高力黄铜 + 固体润滑剂 (镶嵌型) Steel cast CuZn25Al5Fe3Mn3 + solid lubricant (set type)  
2720-B: 钢烧结铜合金 + 固体润滑剂 (弥散型) Steel sintered copper alloy + solid lubricant (dispersion type)  
2820-C: 钢烧结铁镍合金 + 固体润滑剂 (弥散型) Steel sintered iron-nickel alloy + solid lubricant (dispersion type)

Composite self-lubricating guide plate (Japanese standard)  
复合型自润滑滑板 (日本标准)

e	Catalog No.	W	NO.(L)	形状
45	2214	28	75	A
50			100	A
75			120	A
100			150	A
150			200	A
200			250	A
125		300	B	
45		38	75	A
50			100	A
75			125	A
100			150	A
150			200	A
200			250	A
125		300	B	
45		48	75	A
50			100	A
75			150	A
100			150	A
150			200	A
200			250	A
125		300	B	
45		58	75	A
50			100	A
75			125	A
100	150		A	
150	200		A	
200	250		A	
125	300	B		
25	75	75	A	
50		100	A	
75		125	A	
100		150	A	
150		200	A	
200		250	A	
100	300	300	B	
125		300-H	B	

Composite self-lubricating guide plate (Japanese standard)  
复合型自润滑滑板 (日本标准)

e	e1	Catalog No.	W	NO.(L)	形状
50	50	2214	100	100	C
75				125	C
100				150	C
150				200	C
200				250	C
200				300	C
125	50		125	300-H	D
75				125	C
100				150	C
150				200	C
200				250	C
200				300	C
125	75	150	350	C	
75			125-H	C	
100			150-H	C	
150			200-H	C	
200			250-H	C	
200			300-H	C	
125	100	200	350-H	C	
100			150	C	
150			200	C	
200			250	C	
250			300	C	
250			300-H	D	
125	150	200	200	C	
150			250	C	
200			300	C	
250			300-H	D	
250			300	C	
125			300-H	D	

Order 订购 Catalog No. 目录号 . W . L . 厚度 一 材质

2720 028 . 075 . 020 - A  
2720 028 . 075 . 020 - B  
2820 028 . 075 . 020 - C