


1244.

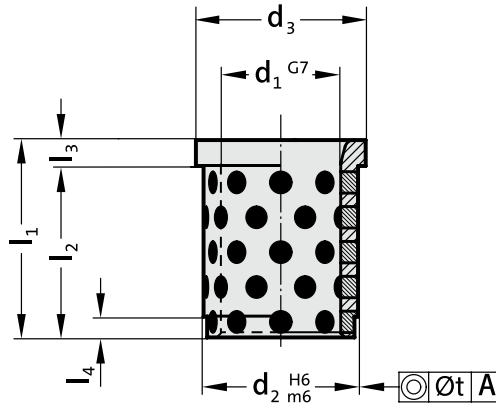

Material 材料:

CuZn25Al5Fe3Mn3+ 固体润滑剂 Solid lubricant

Note 注意:

The guide bush can only be used in axial movement.

The inner diameter contracts when pressed.
该导套只能在轴向运动上使用。
压入时内径收缩。



1244. With flange, self-lubricating guide bush, CNOMO

1244. 带法兰，自润滑导套，CNOMO

| | | | | | | | | |
|----|------|------|------|------|------|------|------|------|
| d1 | 20 | 25 | 32 | 40 | 50 | 63 | 80 | 100 |
| d2 | 28 | 35 | 44 | 52 | 63 | 80 | 100 | 125 |
| d3 | 32 | 40 | 50 | 60 | 71 | 90 | 112 | 140 |
| l1 | 32 | 40 | 50 | 63 | 80 | 100 | 125 | 160 |
| l2 | 28 | 35 | 44 | 55 | 70 | 88 | 109 | 140 |
| l3 | 4 | 5 | 6 | 8 | 10 | 12 | 16 | 20 |
| l4 | 3 | 5 | 8 | 8 | 8 | 10 | 10 | 10 |
| t | 0.01 | 0.01 | 0.01 | 0.02 | 0.02 | 0.02 | 0.02 | 0.02 |



Order 订购

Catalog No. 目录号

1244

d₁

020

l₁

032