


2225 2225.1

Self-lubricating guide plate, Japanese standard 自润滑导板, 日本标准



Material 材料:
CuZn25Al5Fe3Mn3 + 固体润滑剂 Solid lubricant

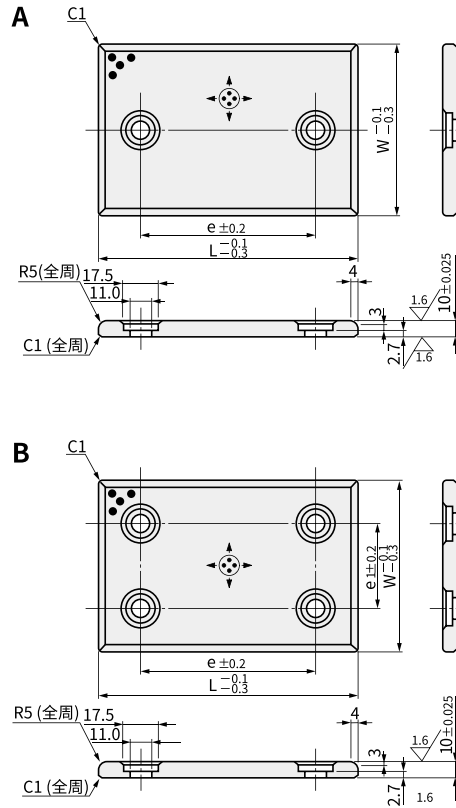

※W=28、38的
纵向R为R2。

W=28、38时
仅纵向(L方向)。

2225. /2215.1 Self-lubricating guide plate, Japanese standard 2225. /2215.1 自润滑导板, 日本标准				
e	CatalogNo.	W	L	形状
45	2225	28	75	A
50			100	A
75			125	A
100			150	A
45			38	75
50		100		A
75		125		A
100		150		A
45		48		15
50			100	A
75			125	A
100			150	A
150			200	A
45		58	75	A
50			100	A
75	125		A	
100	150		A	
150	200		A	
25	75	75	A	
50		100	A	
75		125	A	
100		150	A	
125		175	A	
150		200	A	

2225. /2215.1 Self-lubricating guide plate, Japanese standard 2225. /2215.1 自润滑导板, 日本标准							
e	e1	CatalogNo.	W	L	形状		
50	50	2225	100	100	B		
75				125	B		
100				150	B		
150				200	B		
200				250	B		
100			125	2225	150	150	B
150						200	B
200						250	B
100						150	B
150						200	B
50	-	2225.1	100	100	A		
75				125	A		
100				150	A		
150				200	A		
200				250	A		
100			125	2225.1	150	150	A
150						200	A
200						250	A
100						150	A
150						200	A

Order 订购 . . .

2225 028 075 020
2225.1 100 100 020