


2230

Self-lubricating guide plate, Japanese standard
自润滑导板, 日本标准



2230

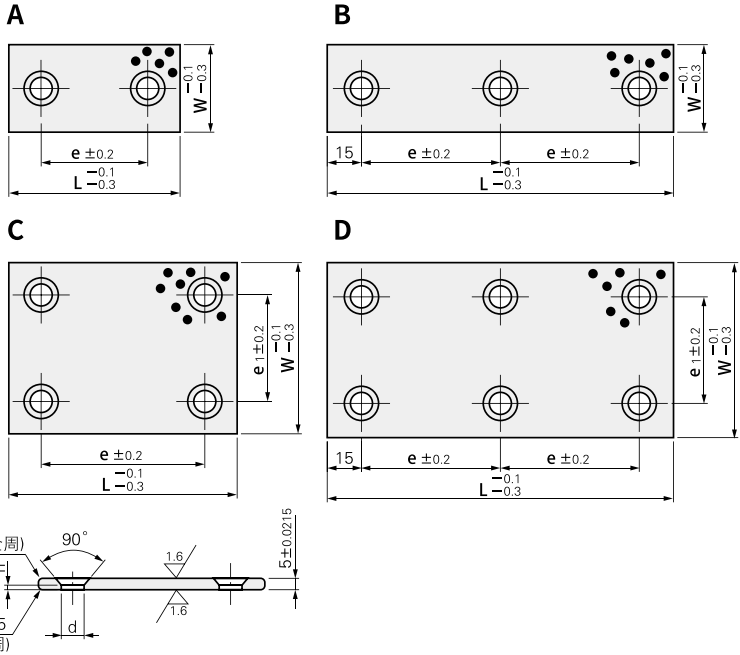

Material 材料:

CuZn25Al5Fe3Mn3 + 固体润滑剂 Solid lubricant

2230. Self-lubricating guide plate, Japanese standard
2230. 自润滑导板, 日本标准

e	e1	d	h	W	L	螺栓孔数量	安装螺栓
20	-	6.5	1.0	18	50	A	M6
45	-	6.5	1.0	18	75	A	M6
70	-	6.5	1.0	18	100	A	M6
60	-	6.5	1.0	18	150	B	M6
20	-	10	0.8	28	50	A	M8
45	-	10	0.8	28	75	A	M8
70	-	10	0.8	28	100	A	M8
60	-	10	0.8	28	150	B	M8
20	-	10	0.8	38	50	A	M8
45	-	10	0.8	38	75	A	M8
70	-	10	0.8	38	100	A	M8
60	-	10	0.8	38	150	B	M8
45	-	10	0.8	48	75	A	M8
70	-	10	0.8	48	100	A	M8
90	-	10	0.8	48	120	A	M8
60	-	10	0.8	48	150	B	M8
45	45	10	0.8	75	75	C	M8
70	45	10	0.8	75	100	C	M8
95	45	10	0.8	75	125	C	M8
60	45	10	0.8	75	150	D	M8
70	70	10	0.8	100	100	C	M8
95	70	10	0.8	100	123	C	M8
60	70	10	0.8	100	150	D	M8

Order 订购 Catalog No. 目录号 . W . L . 厚度
2230 . 018 . 050 . 005