




2512.

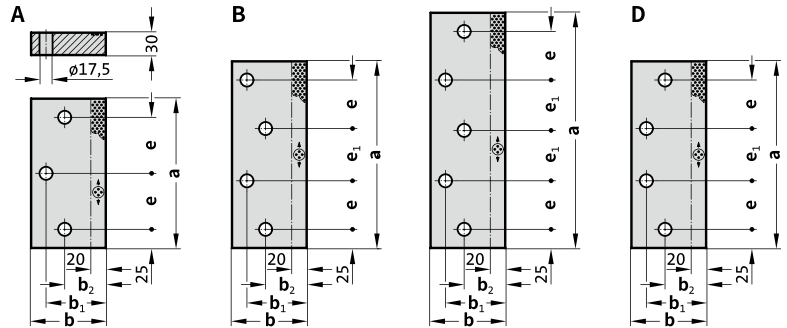

**Material: 材料:**

Steel 钢 + 固体润滑剂

**Description 说明:**

表面高频处理 Surface high frequency processing

硬度 Hardnes: 55~60HRC

2512. Wedge, self-lubricating steel guide plate  
2512. 斜楔，自润滑钢导轨

形状	b	a	b1	b2	e	e <sub>1</sub>	螺栓孔数量
A	75	200	55	40	75	-	3
B	75	250	55	40	65	70	4
D	75	250	55	40	65	70	4
A	75	250	55	40	100	-	3
C	75	315	55	40	65	67.5	5
C	75	350	55	40	75	75	5
C	75	400	55	40	90	85	5
C	75	450	55	40	100	100	5
A	100	200	80	55	75	-	3
B	100	250	80	55	65	70	4
D	100	250	80	55	65	70	4
A	100	250	80	55	100	-	3
C	100	315	80	55	65	67.5	5
C	100	350	80	55	75	75	5
C	100	400	80	55	90	85	5
C	100	450	80	55	100	100	5

2512. Wedge, self-lubricating steel guide plate  
2512. 斜楔，自润滑钢导轨

形状	b	a	b1	b2	e	e <sub>1</sub>	螺栓孔数量
A	125	200	105	65	75	-	3
B	125	250	105	65	65	70	4
D	125	250	105	65	65	70	4
A	125	250	105	65	100	-	3
C	125	315	105	65	65	67.5	5
C	125	350	105	65	75	75	5
C	125	400	105	65	90	85	5
C	125	450	105	65	100	100	5
A	150	200	130	65	75	-	3
B	150	250	130	65	65	70	4
D	150	250	130	65	65	70	4
A	150	250	130	65	100	-	3
C	150	315	130	65	65	67.5	5
C	150	350	130	65	75	75	5
C	150	400	130	65	90	85	5
C	150	450	130	65	100	100	5



Order 订购

Catalog No. 目录号

2512

b

075

a

200

厚度

030