


5240

Flange Bushing Specification & Tolerance 翻边轴套规格及公差

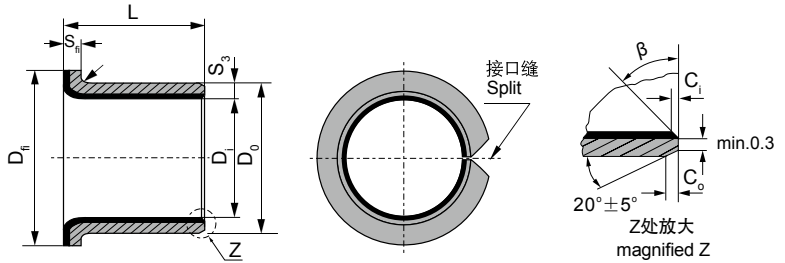

S_3	1.0	1.5	2.0	2.5
r	$1^{-0.5}$	1 ± 0.5	1.5 ± 0.5	2 ± 0.5

单位Unit: mm

5240 Flange Bushing Specification & Tolerance 5240 翻边轴套规格及公差

轴径(f7) Shaft D_s	6	8	10	12	14	15	16	18	20	22	25	30	35	40																				
	-0.013 -0.028		-0.016 -0.034						-0.016 -0.034			-0.025 -0.050																						
座孔(H7) Housing D_H	8	10	12	14	16	17	18	20	23	25	28	34	39	44																				
	+0.015 +0.000		+0.018 +0.000						+0.021 +0.000			+0.025 +0.000																						
(OD) 外径公差 Tolerance D_0	8	10	12	14	16	17	18	20	23	25	28	34	39	44																				
	+0.055 +0.025		+0.065 +0.030						+0.075 +0.035			35.085 34.990																						
(ID) 压装后 内孔公差 After fixed D_{1a}	6	8	10	12	14	15	16	18	20	22	25	30	35	40																				
	+0.055 -0.010		+0.058 -0.010						+0.61 -0.010			+0.071 -0.010			+0.085 -0.010																			
Wall thickness 壁厚 S_3	1.0								1.5			2.0																						
	+0.005 -0.020								+0.005 -0.025			+0.005 -0.030																						
配合间隙 Clearance C_0	0.077 0.000	0.083 0.003	0.086 0.003	0.092 0.006				0.095 0.006			0.112 0.010			0.126 0.010	0.135 0.015																			
D1	6	8	10	12	14	15	16	18	20	22	25	30	35	40																				
D2	8	10	12	14	16	17	18	20	56	58	5/	67	39	55																				
$D_f \pm 0.5$	12	15	18	20	22	23	24	26	30	32	35	42	47	53																				
$L \pm 0.25$	4	7	5.5	7.5	7	9	12	7	9	12	12	17	9	12	17	12	17	12	17	20	11.5	16.5	21.5	15	20	11.5	16.5	21.5	16	26	16	26	26	40
$S_f - 0.2$	1								1.5							2																		

Order 订购 Catalog No. 目录号 D_1 L
5240 . 020 . 020