
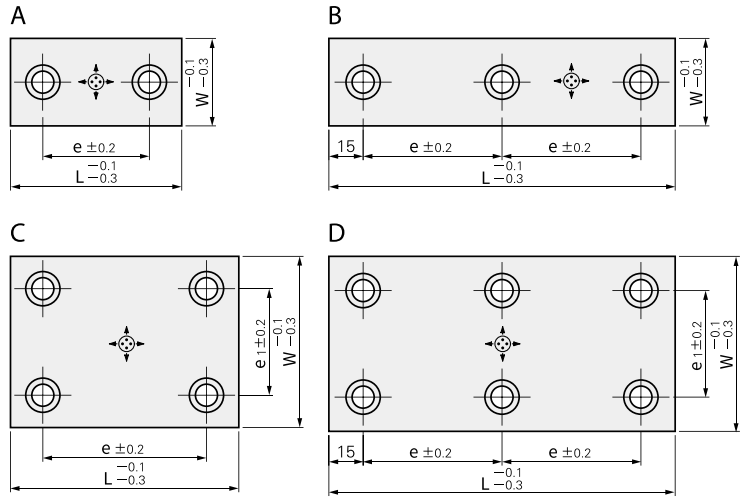


2722-B
2822-C


Composite self-lubricating guide plate
复合型自润滑导板

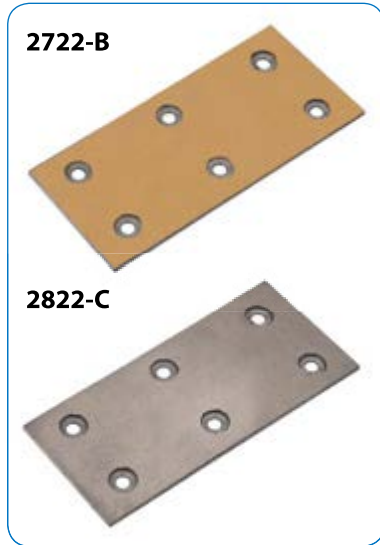

Material: 材料:

2722-B: 钢烧结铜合金 + 固体润滑剂 (弥散型) Steel sintered copper alloy + solid lubricant (dispersion type)

2822-C: 钢烧结铁镍合金 + 固体润滑剂 (弥散型) Steel sintered iron-nickel alloy + solid lubricant (dispersion type)



2722-B/2800-C. Composite self-lubricating guide plate
2722-B/2800-C. 复合型自润滑导板

e	e1	d	h	W	L	螺栓孔数量	安装螺栓
20	-	6.5	1.0	18	50	A	M6
45	-	6.5	1.0	18	75	A	M6
70	-	6.5	1.0	18	100	A	M6
60	-	6.5	1.0	18	150	B	M6
20	-	10	0.8	28	50	A	M8
45	-	10	0.8	28	75	A	M8
70	-	10	0.8	28	100	A	M8
60	-	10	0.8	28	150	B	M8
20	-	10	0.8	38	50	A	M8
45	-	10	0.8	38	75	A	M8
70	-	10	0.8	38	100	A	M8
60	-	10	0.8	38	150	B	M8
45	-	10	0.8	48	75	A	M8
70	-	10	0.8	48	100	A	M8
90	-	10	0.8	48	120	A	M8
60	-	10	0.8	48	150	B	M8
45	45	10	0.8	75	75	C	M8
70	45	10	0.8	75	100	C	M8
95	45	10	0.8	75	125	C	M8
60	45	10	0.8	75	150	D	M8
70	70	10	0.8	100	100	C	M8
95	70	10	0.8	100	123	C	M8
60	70	10	0.8	100	150	D	M8

Order 订购

Catalog No. 目录号 : 2722 : 058 : 100 : 005 - B
2822 : 058 : 100 : 005 - C

W L 厚 材质