




2540  
2246

Self-lubricating guide plate, VDI 3387  
自润滑导向板, VDI 3387

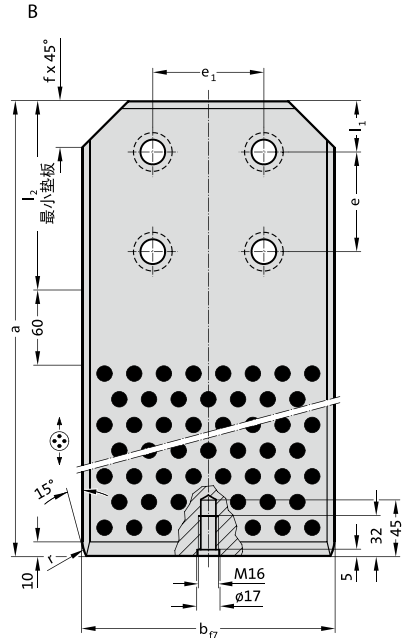

2540

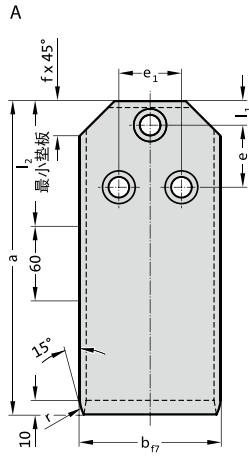

Material 材料:

2540: Steel 钢

2246: CuZn25Al5Fe3Mn3 + 固体润滑剂  
Solid lubricant

Description 说明:

2540: 石墨位置表面高频处理 Graphite position surface high frequency processing

硬度 Hardnes:

2540: 55~60HRC

2246: ≥210HB

2540./2246. Self-lubricating guide plate, VDI 3387

2540./2246. 自润滑导向板, VDI 3387

形状	b	a	c	l1	l2	e	e <sub>1</sub>	d	d <sub>1</sub>	f	t	r	螺栓孔数量
A	63	180	36	20	90	50	36	14	20	18	16	16	3
A	63	200	36	20	90	50	36	14	20	18	16	16	3
A	63	224	36	20	90	50	36	14	20	18	16	16	3
A	71	180	36	20	90	50	36	14	20	18	16	16	3
A	71	200	36	20	90	50	36	14	20	18	16	16	3
A	71	224	36	20	90	50	36	14	20	18	16	16	3
A	90	200	45	20	100	50	50	18	26	28	21	25	3
A	90	224	45	20	100	50	50	18	26	28	21	25	3
A	90	250	45	20	100	50	50	18	26	28	21	25	3
A	112	200	45	20	100	50	50	18	26	28	21	25	3
A	112	224	45	20	100	50	50	18	26	28	21	25	3
A	112	250	45	20	100	50	50	18	26	28	21	25	3
B	140	315	45	40	150	80	90	22	33	36	25.5	25.5	4
B	140	400	45	40	150	80	90	22	33	36	25.5	25.5	4
B	140	400	56	40	150	80	90	22	33	36	25.5	25.5	4
B	190	400	56	40	150	80	90	22	33	36	25.5	25.5	4
B	240	500	56	40	250	160	160	26	40	36	30.5	30.5	4
B	240	630	56	40	250	160	160	26	40	36	30.5	30.5	4



Order 订购

Catalog No. 目录号

2540 : 063 : 180 : 036  
2246 : 063 : 180 : 036